This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Fido Weng	12/11/09'	
B				
C				

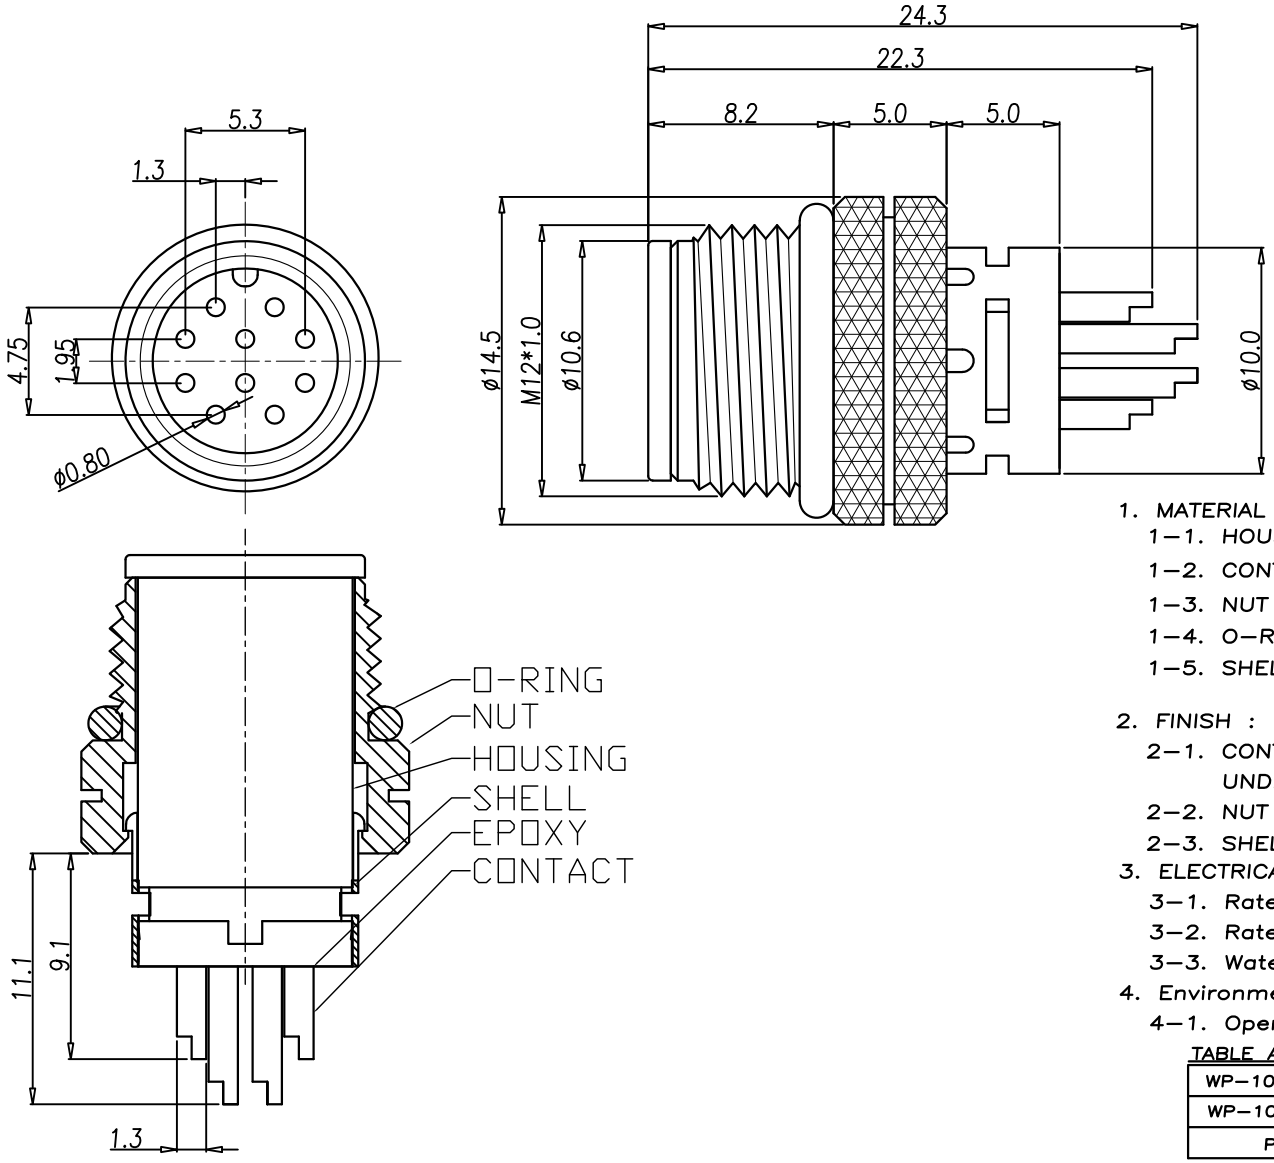

1. MATERIAL :
   - 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
   - 1-2. CONTACT : BRASS
   - 1-3. NUT : BRASS
   - 1-4. O-RING : EPDM
   - 1-5. SHELL : BRASS
2. FINISH :
   - 2-1. CONTACT : SEE TABLE A
     UNDER PLATE : NICKEL
   - 2-2. NUT : NICKEL PLATED
   - 2-3. SHELL : BRIGHT TIN PLATED
3. ELECTRICAL SPECIFICATION :
   - 3-1. Rated current : 2A
   - 3-2. Rated voltage : 30V
   - 3-3. Water proof : IP67
4. Environmental :
   - 4-1. Operation Temperature : -40℃~85℃

TABLE A

PART NO	FINISH
WP-10M2-26-11	GOLD FLASH
WP-10M2-08	GOLD 10u"

DRAWN	Ku Chou	APP'D	Fido Weng	UNIT	mm	TOLERANCE .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.01 ANGULA ±1°	NIAN YEONG ENTERPRISE 年永實業有限公司	TITLE	M12 防水頭10PIN(M)焊線式(接地)		SHEET 1/1
CHK'D	Emily Suen			SCALE	1:1			PART NO.	SEE TABLE A	DWG NO. QC4502	VERSION A