





This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REV.	DESCRIPTION	APPVL. BY	DATE	ECN NO.
A	RELEASE	Emily Suen	06/01/11*	
B				
C				

TABLE A

			
5PIN	4PIN	3PIN	
WP-05M2-44 WP-05M2-243-11	WP-04M2-52 WP-04M2-284-11	WP-03M2-07 WP-03M2-161-11	
WP-05M2-44	10u" GOLD PLATED	WP-05M2-243-11	GOLD FLASH PLATED
WP-04M2-52	10u" GOLD PLATED	WP-04M2-284-11	GOLD FLASH PLATED
WP-03M2-07	10u" GOLD PLATED	WP-03M2-161-11	GOLD FLASH PLATED
PART No.	FINISH	PART No.	FINISH

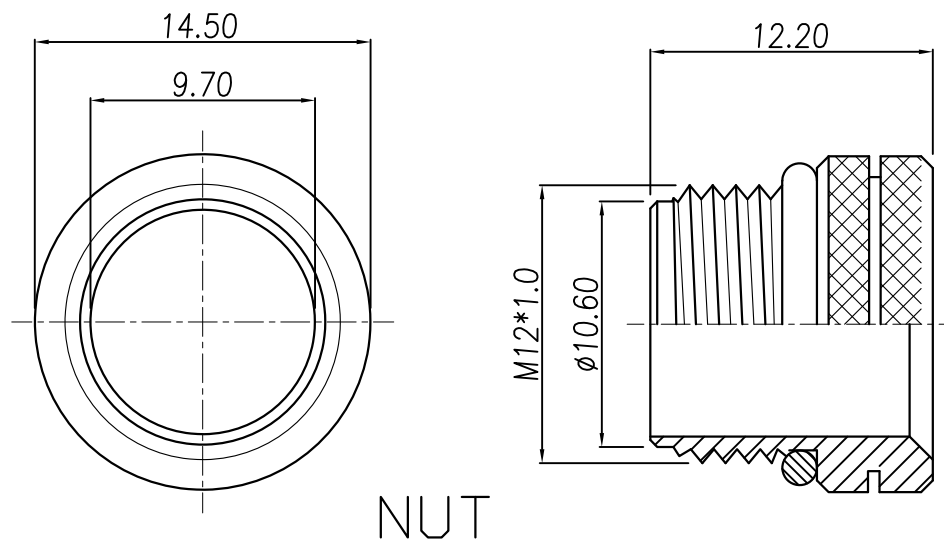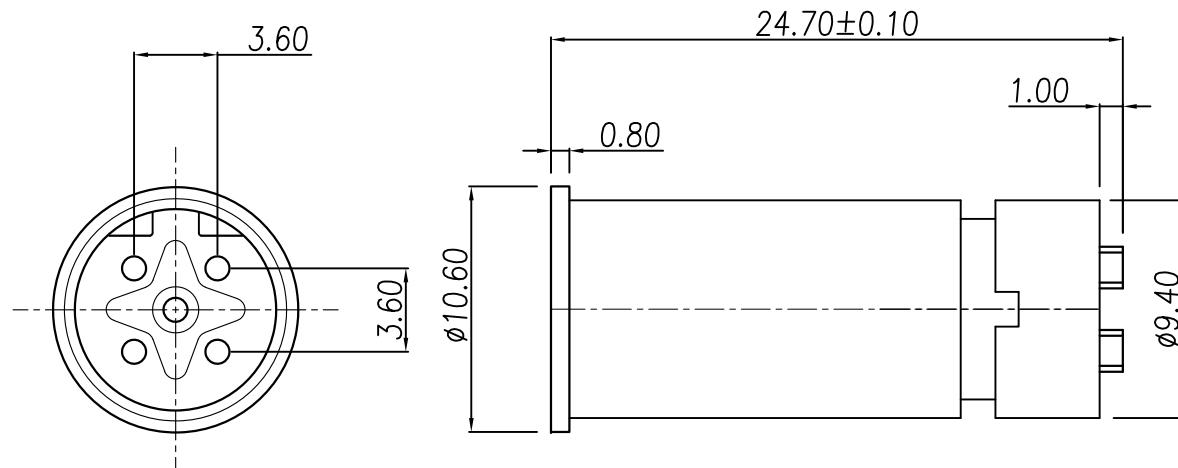

- MATERIAL :
 - 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : BRASS
 - 1-3. NUT : BRASS
 - 1-4. O-RING : EPDM ; COLOR : BLACK
- FINISH :
 - 2-1. CONTACT : SEE TABLE A
UNDER PLATE : NICKEL
 - 2-2. NUT : NICKEL PLATED.
- ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 4A
 - 3-2. Rated voltage : 2~4PIN 250V ; 5PIN 60V
 - 3-3. Water proof : IP67
- Environmental :
 - 4-1. Operation Temperature : -20℃~85℃

DRAW	Ku Chou	APPVL	Fido Weng	UNIT	mm	TOLERANCE		NIAN YEONG ENTERPRISE 年永實業有限公司	TITLE	M12 (M) ,B-coded 焊線式			SHEET
CHECK	Emily Suen			SCALE	1:1	.X ±0.20 .XX ±0.10 .XXX ±0.05 .XXXX ±0.03 ANGULA ±1°			PART NO.	SEE TABLE A	DWG NO.	QC4648	VERSION A