
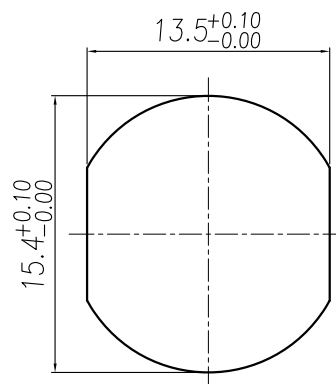
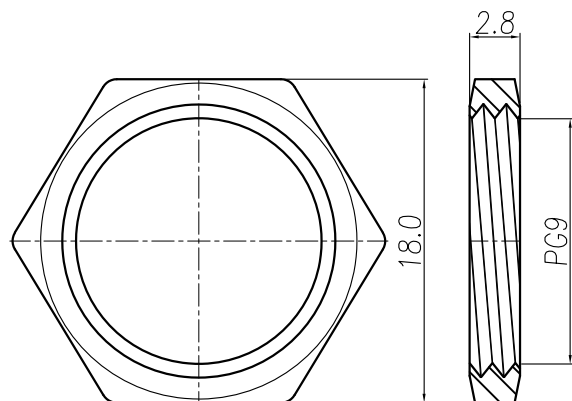
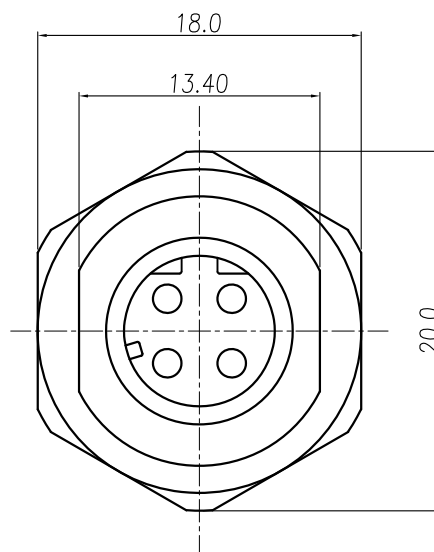


CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Fido Weng	04/03/10*	
B				
C				

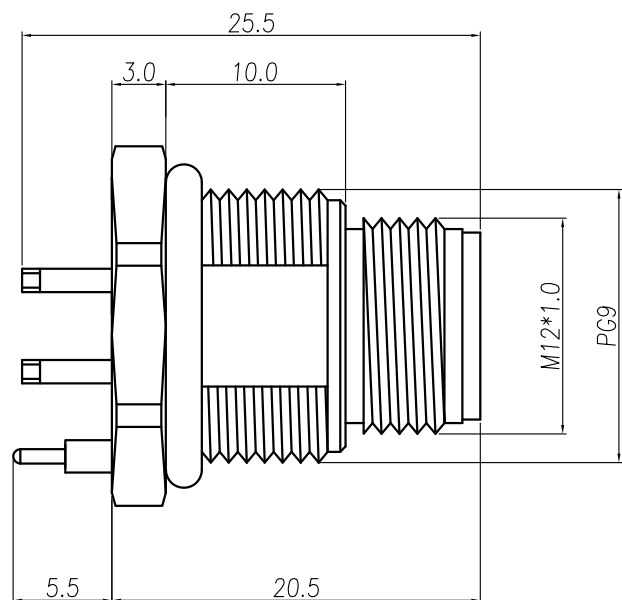

NUT

RECOMMENDPANEL CUT-OUT

1. MATERIAL :
 - 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : BRASS
 - 1-3. NUT : BRASS
 - 1-4. SHELL : BRASS
 - 1-5. O-RING : EPDM ; COLOR : BLACK
2. FINISH :
 - 2-1. CONTACT : SEE TABLE A
UNDER PLATE : NICKEL
 - 2-2. NUT : NICKEL PLATED
 - 2-3. SHELL : NICKEL PLATED
3. ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 4A
 - 3-2. Rated Voltage : 250V
 - 3-3. Water proof: IP67
4. Environmental :
 - 4-1. Operation Temperature : -40℃~85℃

TABLE A

WP-04M2-101-11	10u" GOLD PLATED
WP-04M2-278-11	GOLD FLASH PLATED
PART NO	FINISH

DRAWN	Ku Chou	APPEND	Fido Weng	UNIT	MM		 NIAN YEONG ENTERPRISE 年永實業有限公司	TITLE	M12 D-CODE 4PIN(M) 前鎖PG9插線式(帶接地)			SHEET	1
CHOKED	Emily Suen			SCALE	1:1			.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°	PART NO.	SEE TABLE A	DWG NO.	QC6895	VERSION