




## CUSTOMER DRAWING


REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	LEO	03/01/25*	
B				
$\langle \rangle$				



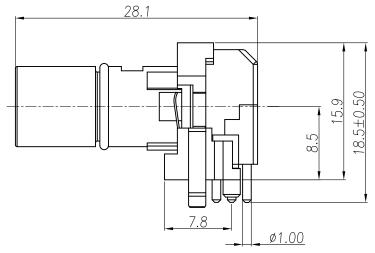



## TABLE A



## 1. MATERIAL :

1-1. HOUSING : PA9T 1-2. CONTACT : BRASS

1-3. O-RING : VITON

1-4. BACK HOUSING : PA9T 1-5. DOWN HOUSING : PA9T

1-6. GROUND : PHOSPHOR BRONZE

2. FINISH:

2-1. CONTACT: GOLD FLASH PLATED.

2-2. GROUND : NICKEL PLATED.

3. ELECTRICAL SPECIFICATION:

3-1. Rated current: 4A

3-2. Rated Voltage : 4PIN 250V ;5PIN 60V

3-3. Water proof : IP67 (in mated condition)

4. Environmental :

4-1. Operation Temperature : -25℃~85℃

DRAWN	LEO	APP'D	Ku Chou	UNIT	mm	* TOLERANCE .x ±0,20 .xx ±0,10	A NIAN YEONG ENTERPRISE	TITLE	WP M12 D−CODING (M) Two-piece 90#			SHEET 2	
CHK'D	Ku Chou			SCALE	1:1	.xxx ±0.05 .xxxx ±0.03 ANGULAR ±1*		年 永 實 業 有 限 公 司	PART NO.	SEE TABLE A	DWG N□.	QC11229	VERSION A

