
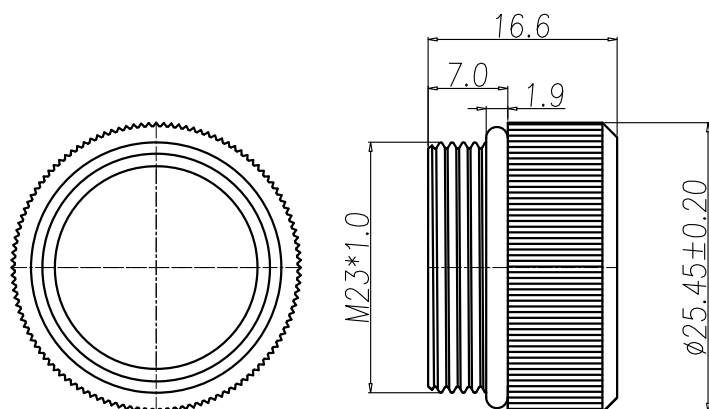
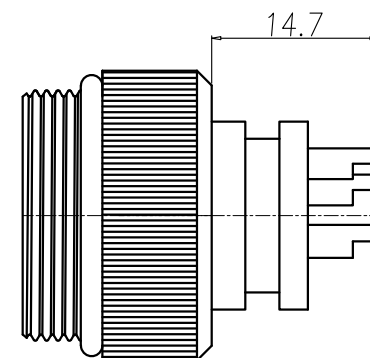


This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Fido Weng	03/05/11*	
B	新增料號	KU	11/01/19*	
C				

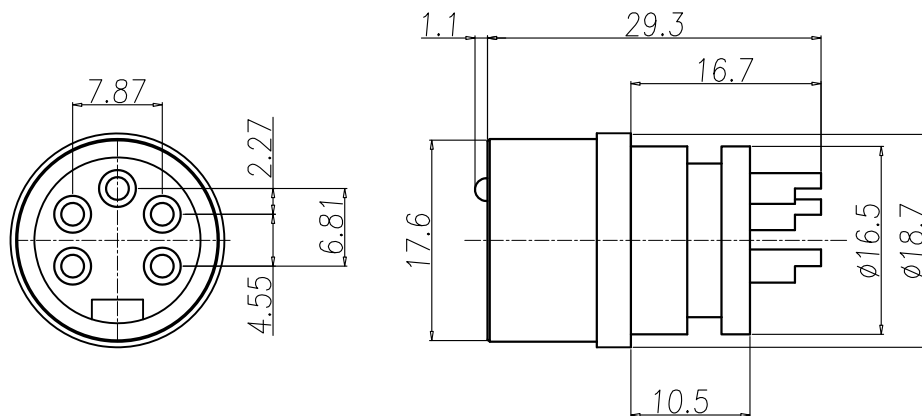

NUT

- MATERIAL :
 - 1-1. HOUSING : PBT UL94V-0 ; COLOR : YELLOW.
 - 1-2. CONTACT : BRASS
 - 1-3. NUT : BRASS
 - 1-4. O-RING : NBR ; COLOR : BLACK
- FINISH :
 - 2-1. CONTACT : SEE TABLE A
UNDER PLATE : NICKEL
 - 2-2. NUT : NICKEL PLATED
- ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 20A
 - 3-2. Rated voltage : 250V
 - 3-3. Water proof : IP68
- Environmental :
 - 4-1. Operation Temperature : -20℃~85℃

3PIN	4PIN	5PIN
WP-03M2-104-11 WP-03M2-171-11	WP-04M2-168-11 WP-04M2-302-11	WP-05M2-54 WP-05M2-265-11

TABLE A

WP-05M2-54	30u" GOLD PLATED	WP-05M2-265-11	GOLD FLASH PLATED
WP-04M2-168-11	30u" GOLD PLATED	WP-04M2-302-11	GOLD FLASH PLATED
WP-03M2-104-11	30u" GOLD PLATED	WP-03M2-171-11	GOLD FLASH PLATED
PART No.	FINISH	PART No.	FINISH

DRAWN	Ku Chou	APPEND	Emily Suen	UNIT	mm	TOLERANCE		NIAN YEONG ENTERPRISE 年永實業有限公司	TITLE	WP M23 (M) 焊線式			SHEET
CHK'D	Emily Suen			SCALE	1:1	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°			PART NO.	SEE TABLE A	DWG NO.	QC5333	VERSION B